

Zincatile[®]

1. Description

Product manufactured on galvanized steel and painted to resemble traditional tile with the durability of coated steel.

2. Uses

To use on commercial and residential applications.

3. Substrate and coating

Product ETP

Armadillo N3 ETP MEXJUV P09 TER CONST

Pintro 001

Steel Grade SS37 (Fy = 37 ksi)

Standard Colors

Red Terracota Polyester Cool Roof

Cool Roof

4. Characteristics of Products


- Design to resemble typical Spanish tiling
- Minimum inclination of 25%
- Recommended inclination of 30%

- Can be installed over metal purlins, wood panels, and over concrete slab.
- With over 70° inclination must be first thermally insulated because they work as walls. Ventilation will be through the false ceiling of the interior wings and through the ridge cover from the bottom towards up.
- Separation between supports in multiples of 1 foot, with 3 feet maximum.
- By being fixated on both ends of the sheet, there is no need for vertical supports, and guarantees better wind resistance.
- Weight per squared meter is equivalent to 4.8 Kg.

5. Dimensional Range

- Coverage of 1000 mm (39.37")
- Available on 26 calibre
- Minimum length of 1000 mm (8') maximum 6096 mm (20') in multiples of tiles of 3050 mm.

6. Geometry

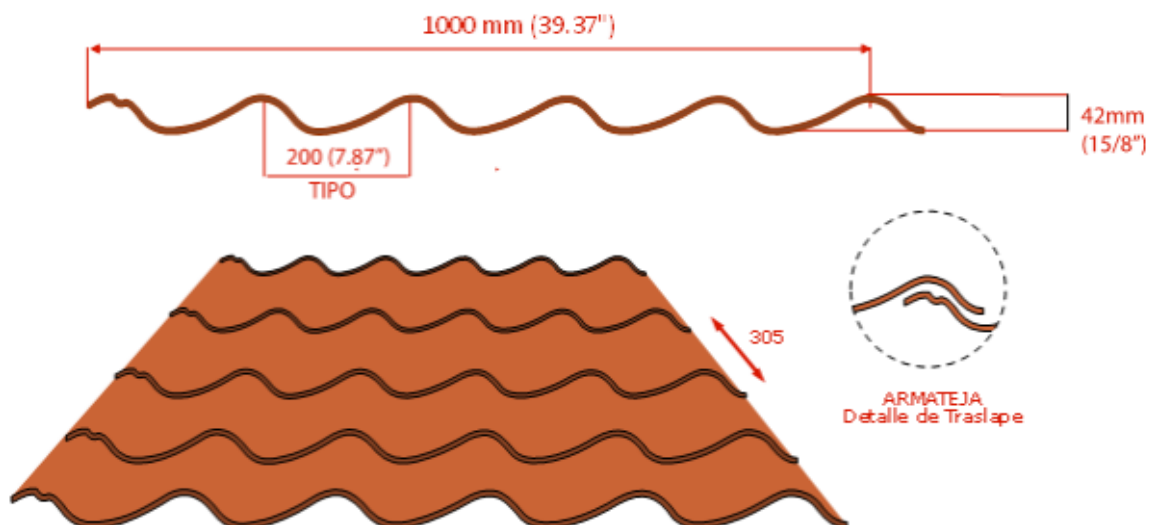

Dimensions

Coverage (A)

1000 mm (39.37")

7. Loads

This product does not operate structurally as our traditional rolled steel, we recommend supports at a maximum of 1.52 m (5')

Armadillo Steel provides this information as a support for the application of products therefore it is not to be held responsible or accountable for the possible misuse; it is recommended to have a qualified engineer verify the application.

Armadillo Steel denies any guarantee, expressed or implicit. By making this information available, Armadillo Steel is not providing any type of professional services and assumes no duties or responsibilities regarding any person that uses this information. Also, Armadillo Steel will not be responsible for any reclamation, lawsuit, injury, losses, expenses or accountability of any type that results or is connected with the use of the information contained in this publication even if the aforementioned reclamation, lawsuit, injury, losses, expenses or accountability is directly or indirectly from any actions or omissions by Armadillo Steel. Any party that uses the information presented in this publication assumes the whole responsibility from its use.

Because there are risks regarding the handling, installing and using steel and accessories, we recommend that the involved parties that handle, install or use the products, review all the technical and security sheets

available from the material manufacturer, norms and regulations from the relevant government agencies that have any jurisdiction regarding the handling, installing and using the products, as well as other relevant construction practices publications.